



# OPERATORS AND LIQUID SYSTEMS SHOULD ALWAYS BE IN CONSTANT MOTION.


Precision application can make the difference between a profitable year and a break-even year. So, when we set out to redefine the RoGator, we started with the liquid system. Our goals were simple: make agronomists happy by being safer for the crop, make accountants happy by minimising product waste and improving precision and make the owner happy by making his daily operation more productive. And, if you happen to be all three of those, well, this is definitely your machine.

HOW APPLICATORS SPEND THEIR TIME:

<50% applying product

>50%
prepping,
boom priming,
cleanout,
maintenance, etc.

THAT'S NOT THE MOST PROFITABLE RATIO

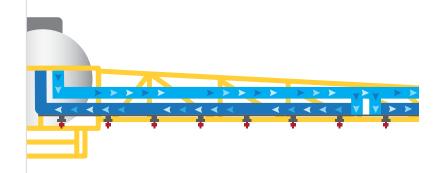

LiquidLogic<sup>™</sup>
ARGUABLY THE WORLD'S MOST ADVANCED
LIQUID-SYSTEM TECHNOLOGY

CONTINUOUS RECIRCULATION Our industry-exclusive FlowLogic™ system constantly circulates product through the boom, plumbing and filters. Start with charged booms without wasteful stationary spraying, apply with product always in motion to prevent settling and clogging and finish with a thorough rinse that significantly minimises the risk of contamination.

**LESS BUILD-UP, MORE PRECISION** Streamlined plumbing eliminates dead ends where residues can accumulate, and product flows efficiently for the best possible tip-to-tip spray performance.

**SELF-PRIMING BOOM** Once the product pump and recirculation is turned on, product begins to flow through the entire boom plumbing, quickly priming the boom. You save time and money and place the product where it's needed.





#### LESS OVERLAP, LESS CROP DAMAGE

Our NozzleLogic™ system controls up to 36 boom sections. Nozzle body valves provide precise on/off section spray control, so you spray where you want to, not where you don't.

#### PRODUCT STAYS PERPETUALLY MIXED

With the OptiMotion<sup>™</sup> auto-agitation system, you preset the amount of agitation, and the machine automatically adjusts as the tank empties, letting you focus on application, not adjusting valves.


#### **ALWAYS LOAD THE RIGHT AMOUNT**

The OptiLoad™ side reload keypad lets you reload the precise amount for the acreage you're spraying. Pair with AgControl® to see a display of the remaining acres you can treat.





## ClearFlow UNPRECEDENTED PRODUCT RECOVERY

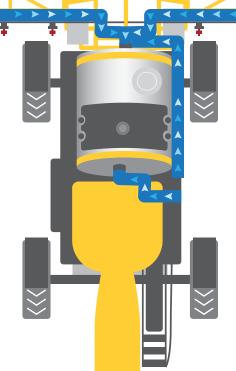

Rain, wind and a hundred other things can stop a job before it's done, letting residues settle in the plumbing. ClearFlow™, the industry's first full-recovery system, pushes unused product from the plumbing back into the tank, prior to a tank or boom rinse. Product goes back in the tank to be reagitated or off-loaded, minimising waste and contamination. So you'll be confident plumbing and booms are clean.



#### BETTER BOOMS. BETTER YIELDS.

We offer the most boom options in the business. All of them are strong and durable booms, and some are longer and lighter than ever before.

- Superior stability Get 90- or 100-ft. booms on the 90/100 rear boom frame for a lighter footprint, or 90-, 100- or 120-ft. booms on the 120 rear boom frame.
- A wider, lighter footprint Optional 120- and 132-ft. aluminium booms are not only longer, but lighter. They also feature enhanced nozzle protection for even more precise product placement.

## 48.5 METRE ALUMINIUM POMMIER BOOM AVAILABLE ON ROGATOR RG1300C

### NO CROP LEFT BEHIND.

The more accurately you can apply, the more your investment in every single crop can pay off. Enter the RoGator C Series. Uniform, precision placement means less variability from acre to acre.

Crops aren't overfed. Or starved. Each one is treated just right.



#### POMMIER BOOMS - BIG BOOMS FOR BIG ACRES

The RoGator RG1300C is available with a 48.5 metre, aluminium Pommier boom. Pommier are world-wide industry leaders in aluminium boom innovation, design and manufacturing. They have over thirty years of experience and are the best solution for farmers wanting a lighter, stronger, wider boom.

**LESS WEIGHT** FACT 1: Aluminium booms weigh less than steel booms, simple as that.

FACT 2: Increased momentum is influenced by increased weight.

Reducing the weight on the boom wings which is ultimately transferred to the centre when spraying, will improve the sprayer's overall field performance.

The profile of the Pommier 48.5 metre aluminium booms have a low weight and ability to withstand heavy work loads. They are proven to be 50% lighter and 20% stronger than their closest competitor product.

LONGEVITY Aluminium has unique properties that ensure long lasting performance and very little maintenance. Pommier booms are corrosion resistant due to surface oxidisation protecting the aluminium, so there's no reason to paint!

NORAC BOOM HEIGHT CONTROL This is a standard feature of the 48.5 metre Pommier boom and allows the boom to shadow the ground – even in rough or hilly terrain to maintain an optimum boom height, reduce drift and improve stability.

WING FOLD Hinge points, pins and locks are made from steel where the duty cycle is high and adjustment may be required. The boom alignment can be adjusted quickly and simply at the hinge points. **WING LOCK** The wing section have a mechanical self-lock and a hydraulic unlock.

MULTI-DIRECTIONAL BREAKAWAYS The breakaways are designed with the ability to move backwards, forwards and up.

LIGHTER, STRONGER, WIDER

POMMIER BOOMS ARE PERFECT FOR TOUGH AUSTRALIAN CONDITIONS

## CROPLANDS OPTIONAL AIRPRO 3 TIERED APPLICATION

Some growers face the difficult task of spraying in a wide range of speeds and often have trouble with accurate and reliable application in all areas of their paddocks. AirPro makes life easy by switching a second set of nozzles on or off to ensure you have the right rate applied across your entire paddock. A fantastic option for operating in hilly terrain or with contours.



#### SAVE TIME, IMPROVE ACCURACY

The 3 tiered software automatically selects the nozzles to ensure efficient spraying over a large speed range, for example: tier 1 may use Green 015 nozzles over contour banks and as speed increases tier 2 turns on using a Yellow 02 nozzle and at higher speeds both lines turn ON delivering the equivalent volume as an 035 nozzle.

With triple nozzle bodies fitted standard to all of our sprayers the AirPro system can be fitted with a range of nozzles to ensure constant and reliable application in virtually any spraying scenario encountered in the Australian broadacre market today.

The new AirPro design has been refined with stainless steel boom tubes for improved fast flow, back to tank recirculation and easy boom clean out.

Priming the boom for consistency in application is also more efficient with AirPro. AirPro's Air Flush feature makes the process of decontaminating the sprayer fast and efficient by evacuating all chemical and boom cleaners from the boom lines with simple air pressure.

#### SUPERIOR APPLICATION

Delaying the onset of herbicide resistance is imperative for future farming efficiencies. AirPro improves penetration using closer nozzle spacings. It also better matches droplet spectrums to the target, for example in grasses coverage can be maximised. AirPro has been developed to deliver – even in Australia's most challenging conditions.

AirPro uses a single stainless steel boom tube with nozzles at 250mm or 10" spacings. Every second nozzle is connected to tier 1 and the other nozzles connected to tier 2.

Auto Section Controls can now function immediately with the valve at the nozzle body. ON/OFF is fast to gain the maximum benefit of AutoSection Controls.





#### A DRIVE SYSTEM THAT'S ALWAYS THINKING. EVEN WHEN THE OPERATOR IS THINKING ABOUT SOMETHING ELSE.

This drive system practically runs itself. From the tractor management system (TMS) to the AWD SmartDrive<sup>™</sup>, the core productivity drivers of this machine continuously work in the background, with virtually no input or management from you. The TMS automatically increases engine RPM when more power is needed, and reduces RPM when the running is easier. AccuCruise<sup>™</sup> and shuttle speed controls work to achieve specific speed settings at the touch of a button, freeing the operator to focus on quality application. At the end of the day, you'll see unprecedented productivity, thrifty fuel consumption and a less-fatigued operator.

#### **ENHANCED HYDROSTATIC BRAKING**

The advanced anti-lock braking system (ABS) prevents skids and lock-ups for more controlled stopping.

#### **OPTIONAL HILL-CLIMB PACKAGE**


Australia has some of the steepest, most rugged terrain in agriculture. The RoGator C Series has a package for that.

#### **TURN-COMPENSATED WHEEL SPEED**

Control wheel speed independently at each wheel, so the machine can drive the outside wheels faster in tight turns. This creates less soil disruption and less crop damage.

#### **QUICK FAMILIARITY**

Functional operation is similar to other cutting-edge AGCO® equipment, so operators can easily move between machines.

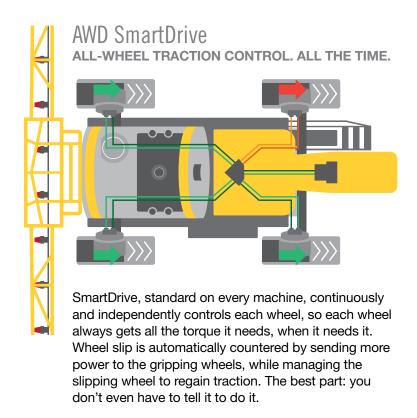







## SO INTUITIVE, EVEN THE CAMERA TURNS ITSELF ON.

Precision productivity starts with smart, intuitive features that help you do more with less effort in less time. For this RoGator, we looked at every little thing and asked ourselves, "Can we make it better?" You be the judge.

**LIGHTING KEYPAD** Customise your new and improved LED lighting once, then control it easily with a single button.

**NEW FLOATING ARMREST** New ergonomically improved, adjustable armrest puts the joystick, section switches, boom controls and liquid system controls at your fingertips.

**BLUETOOTH®** New Bluetooth microphone improves focus, while keeping you connected at all times.

**AUTO-TRACK ADJUST** Position wheels for different row spacing. Choose between two preset widths, or use offset widths to minimise compaction.

**REAR-VIEW CAMERA (standard)** Set it to come on automatically when you go into reverse or on the road.

#### AUTOMATIC BATTERY DISCONNECT

Operates automatically upon turning off the machine and completion of any shutdown procedures.

**SELF-CANCELLING TURN SIGNALS**Focus on the job, not turning off the signal.

**USB POWER PORTS** Keep electronics constantly charged.

**COMMON KEY** The ignition key also unlocks the door, lockable fuel caps and toolbox.

**HOOD LATCH** Push-button hood latch locks the hood for better security.



# NO. YOU WON'T NEED A TEAM OF I.T. PEOPLE TO MAKE IT WORK.

You can't be a precision applicator if there has to be a computer geek riding in the jump seat while you work. As we've pushed ourselves to add more capability and technology to our equipment, we've also been driven to make their actual operation easier. Simply put, the RoGator C Series is packed with advanced technology, but it's not intimidating at all.

This machine is built around a simple, intuitive operational platform that virtually anyone can master. We call it the AccuTerminal<sup>™</sup>, a universal interface that lets you control and monitor virtually all chassis and machine functions right at your fingertips.

**INTUITIVE COMMAND CENTRE** Operating elements on the comfortable, floating armrest include the AccuTerminal, multifunction joystick and keypad.

VIEW UP TO FOUR FUNCTIONS AT ONCE Customise your terminal to view one function or up to four different ones simultaneously.

SIMPLE, INTUITIVE CONTROLS Engine, transmission, hydraulic, axle, spray functions, one-touch fold, electric sump, pump, main shutoff valve (MSO), recirculation, system maintenance and more are easily managed right from your fingertips.

#### THE ACCUTERMINAL PUTS YOU IN TOTAL CONTROL.

The following technology is factory-integrated in the AccuTerminal:

**SLICK SCREEN NAVIGATION** The 10.4-in. AccuTerminal has a smartphone look and intuitive touch-screen technology surface that lets you easily manoeuvre through functions. The high-resolution, scratch-resistant screen and all function indicators automatically adjust to match light conditions.

RATE AND SECTION CONTROL AgControl rate and section control lets you control up to 36 sections with tip-to-target accuracy, and seamless integration between software, pump, plumbing system and all chassis functions.

**GUIDANCE TECHNOLOGY** With the new Auto-Guide™ guidance system, you will acquire way lines and steer accurately, even in difficult reception conditions.

- Sub-meter to centimetre accuracy minimises overlap and skips.
- The same accuracy while working in foggy and dusty conditions, day or night.
- Reduces operator fatigue.
- Multitask in the cab, including system monitoring, calls and operation management.

- Complete jobs faster with greater precision.
- Reduce inputs (fuel, labour, product, etc.).
- Integrated hardware for less cab clutter.
- Reduced machine wear and tear.

**HEADLAND MANAGEMENT** With AccuField Command<sup>™</sup> headland management, operators can activate automated operating sequences at headlands with the touch of a button, saving time and improving productivity.

GPS RECEIVER OPTIONS Choose the best navigation accuracy level and signal source for your operation; options available from NovAtel® and Trimble®.

**CAMERA INTEGRATION** The AccuTerminal comes standard with a rear mounted camera that automatically switches to full-screen when reversing. It can take a second camera if required. You can also optionally add four more cameras with an additional display.

**OPTIONAL TECHNOLOGY** Speak to your local Croplands self-propelled dealer or Croplands representative regarding alternative steer packages, such as Trimble and GreenStar™.



AgControl rate and section control, Auto-Guide position and steering and VRT prescription map screens shown.



AgControl rate and section control, TaskDoc data management and VRT prescription map screens shown.



#### AIR-MAX® 180

The industry's only pneumatic air spreader built for high-clearance, row-crop application gives you the versatility for year-round operation.

#### THE PRECISE PRESCRIPTION FOR ANY

**CROP** Apply the rate each crop requires, when and where it's needed. You'll get optimal results with load, in every field, every time.

**SECTION CONTROL** Two 30-ft. sections deliver more accurate placement, which optimises crop performance and uses your fertiliser investment more efficiently.

MULTI-BIN The 30-ft.<sup>3</sup> (849.5-L) bin can be configured to deliver optimal crop nutrition with multiple products. Optional metering system handles main bin rates from 45–850 lbs./acre (50.4–952.7 kg./ha), granular bin rates from 3–65 lbs./acre (3.4–72.8 kg./ha).

**BOOMS** 60-ft. (18.3-m) booms made of five 304 stainless steel tubes. Patented Flat Flex design ensures precise application, despite wind or other outside factors.

#### STAINLESS STEEL DOORMAT CHAIN

Heavy-duty, corrosion-resistant chain drives consistent, accurate product flow to the booms, for even application.

**ENHANCED BOOM LIGHTING** Provides excellent boom visibility for low-light or night work.

#### STANDARD ELECTRIC ROLL TARP

Factory-installed to keep product dry and clean. Stainless steel end caps won't rust or crack.

#### NEW LEADER® EDGE

Choose either the L4258G4 or the L4330G4 Crop Nutrient Applicator, both available MultApplier-ready or MultApplier-complete.

- ISO interface Consistent ISO product control system, regardless of terminal.
- **Boundary spreading** Independent spinner speed control slows one spinner down to keep product in the field.
- Feed gate optimiser Indicates achievable rates based on gate spreading.
- Flip-up hillside divider Flip up to provide storage when spreading lime. Flip down when applying fertiliser product.
- **Stainless steel durability** 304 stainless steel sills, cross tubes, mounts and take-ups extend box life.
- Front/rear grease banks Centrally located grease banks make service easier.

#### **ROGATOR C SERIES SPECIFICATIONS**\*

MODELS	RG1100C	RG1300C	
DRIVE SYSTEM			
Management	TMS – smart power and RPM automation		
Traction control	AWD SmartDrive four-wheel independent traction and speed control, standard		
Speed control	AccuCruise speed presets (2 field, 2 road); forward and reverse shuttle		
SYSTEMS			
Combo chassis	Yes		
LiquidLogic liquid management	FlowLogic recirculating boom; NozzleLogic at-nozzle shut-off; OptiLoad level sensor, keypad with display and in-terminal readout; OptiMotion auto-scaled agitation; Opt. ClearFlow boom clean out/recovery		
Booms – m	27.4/30.5/36.6 Std.: stainless steel recirculating plumbing 36.6/40.2 aluminium boom with stainless steel recirculating plumbing for 20 in. (.5 m) spacing	27.4/30.5/36.6 Std.: stainless steel recirculating plumbing 36.6/40.2 aluminium boom with stainless steel recirculating plumbing for 20 in. (.5 m) spacing Optional 48.5 m aluminium Pommier boom	
Dry systems – ft.3 (m3)	New Leader Edge spinner 258 (7.3) MultApplier-ready or MultApplier-complete	Air-Max 180 with or without granular; New Leader Edge spinner 258 (7.3) or 299 (8.5), MultApplier-ready or MultApplier-complete	
WEIGHTS'			
Weights (full fuel, unladen) - kg.	14,185 120 ft. steel booms	14,465 120 ft. steel booms	
SPEED			
Field speed – kph	42		
Road speed – kph	53	58	
ENGINE			
Make	AGCO Power		
Model	AP84-4		
Number of cylinders	6		
HP @ 2,100 RPM (kW)	315 (235)	339 (253)	
Peak HP @ 1,900 RPM (kW)	341 (254)	370 (276)	
Displacement – in.3 (L)	512 (8.4)		
Torque @ 1,500 RPM	1,106 ftlbs. (1,499 Nm)	1,180 ftlbs. (1,600 Nm)	

MODELS	RG1100C	RG1300C		
FINAL DRIVE				
Wheel motor type	Variable displacement			
Wheel motor size	80 cc	110 cc		
Standard gearbox	26.6:1	22.1:1		
High-torque gearbox	N/A	31.7:1		
FLUID CAPACITIES				
Fuel – L	567			
Hydraulic reservoir – L	227			
Engine oil – L	22.7			
Engine coolant – L	32			
Gear box - L	4.3			
Windshield washer reservoir – L	1.5			
BRAKES				
Primary	Hydrostatic dynamic braking			
Service	Hydrostatic plus disc brakes on front wheels			
Parking	Multiple discs in gearboxes			
CAB				
Cab suspension	Isolator mount with air ride cab			
Radio	AM/FM CD with weather band with Bluetooth and mic. Opt. satellite radio			
HVAC	Automatic temperature control			
Filtration	Three-level activated carbon			
Steering wheel	14-in. diameter, leather-wrapped			
Standard seat	Air-ride seat suspension (cloth)			
Optional seat	Heated/vented leather			
CONTROLLERS				
Std.	AccuTerminal with AgControl rate and section control, 35/36 sections			
Opt.	Raven Viper 4 with AccuBoom <sup>™</sup> section control, 15/16 sections			

<sup>\*</sup>Specifications are manufacturer's estimates at time of publication and are subject to change without prior notification. Actual weight will vary depending on optional equipment.



#### ROGATOR C SERIES | RG1100C | RG1300C

# CROPLANDS CREDIT At Croplands Credit, we understand that financing is as much a part of your purchase decision as the features and benefits of the product. So, we're committed to providing the best means of acquiring the equipment you need, while allowing you to preserve other credit lines of operating capital. CROPLANDS AUSTRALIA Phone 1300 131 513 Freecall 1800 ROGATOR (7642 867) Fax 07 4641 3444 Email sales@croplands.com.au

#### **SERVICE MANAGER**

Malcolm Reck 0438 134 135



**CROPLANDS NATIONAL SALES AND SUPPORT** 

NORTH REGION

0409 065 994

Craig Blackett Jeremy Rennick

NORTH NSW/QLD

0407 485 569



© 2017 AGCO Corporation. Challenger and RoGator are brands of AGCO Corporation. AccuCruise", AccuField Command™, AccuBoom™, AccuTerminal™, AGCO Finance®, AGCO®, AGCO Power™, AgCommand®, AgControl®, Air-Max®, AWD SmartDrive™, ClearFlow™, FlowLogic™, Fuse®, LiquidLogic™, NozzleLogic™, OptiMotion™, RoGator® and TaskDoc® are trademarks of AGCO. Auto-Guide™ and Challenger® are trademarks of Caterpillar Inc. and are used under license by AGCO. Apple®, iPad® and iTunes® are trademarks of Apple Inc. Bluetooth® is a trademark of Bluetooth SIG, Inc. Harley-Davidson® is a trademark of H-D U.S.A., LLC. New Leader® is a trademark of Highway Equipment Company. NovAtel® is a trademark of NovAtel Inc. Raven® and Viper® are trademarks of Raven Industries, Inc. Trimble® is a trademark of Trimble Inc. All rights reserved. RG17B001CR (08) 8 DR

AGCO may at any time, and from time to time, for technical or other necessary reasons, modify any of the data, specifications or warranty of the products described herein. Some equipment shown may be optional. Attention: Photographs in this publication may show protective shields and quards open or removed for the purposes of illustration. Be certain all shields and quards are in place during operation.